



EMC TEST REPORT

For

NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE
REKLAM SAN. TIC. LTD. STI.

HAND-HELD DETECTOR

Model No. : ULTRA SCANNER

Prepared for : NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE REKLAM
SAN. TIC. LTD. STI.

Address : SIVATYOLU CAD. SAKIZ SOK. NO4 SANCAKTEPE
ISTANBUL TURKEY

Prepared By : Shenzhen Certification Technology Service Co., Ltd.

Address : 2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China

Tel: 400-6786199

Fax: (0755) 26736857

Report Number : STE130318320

Date of Test : March 19-22, 2013

Date of Report : March 22, 2013

TABLE OF CONTENTS

Description	Page
Test Report Declaration.....	5
1. SUMMARY OF STANDARDS AND RESULTS	6
1.1. Description of Standards and Results	6
2. GENERAL INFORMATION	7
2.1. Description of Device (EUT).....	7
2.2. Tested Supporting System Details	8
2.3. Block Diagram of connection between EUT and simulators.....	8
2.4. Test Facility	9
2.5. Measurement Uncertainty	9
3. CONDUCTED DISTURBANCE AT MAINS TERMINALS TEST	10
3.1. Test Equipment	10
3.2. Block Diagram of Test Setup.....	10
3.3. Test Standard	10
3.4. Power Line Conducted Disturbance at Mains Terminals Limit	10
3.5. EUT Configuration on Test	11
3.6. Operating Condition of EUT	11
3.7. Test Procedure	11
3.8. Conducted Disturbance at Mains Terminals Test Results	11
4. RADIATED DISTURBANCE TEST	12
4.1. Test Equipments	12
4.2. Block Diagram of Test Setup.....	12
4.3. Test Standard	12
4.4. Radiated Disturbance Limit	12
4.5. EUT Configuration on Test	13
4.6. Operating Condition of EUT	13
4.7. Test Procedure	13
4.8. Radiated Disturbance Test Results	14
5. HARMONIC CURRENT TEST	17
5.1. Test Equipments	17
5.2. Block Diagram of Test Setup.....	17
5.3. Test Standard	17
5.4. Limits of Harmonic Current	17
5.5. Operating Condition of EUT	18
5.6. Test Procedure	18
5.7. Test Results.....	18
6. VOLTAGE FLUCTUATIONS & FLICKER TEST	19
6.1. Test Equipment	19
6.2. Block Diagram of Test Setup.....	19
6.3. Test Standard	19
6.4. Limits of Voltage Fluctuation and Flick	19
6.5. Operating Condition of EUT	19
6.6. Test Procedure	19
6.7. Test Results.....	19
7. IMMUNITY PERFORMANCE CRITERIA	20



8. ELECTROSTATIC DISCHARGE IMMUNITY TEST	21
8.1. Test Equipments	21
8.2. Block Diagram of Test Setup	21
8.3. Test Standard	21
8.4. Severity Levels and Performance Criterion	21
8.5. EUT Configuration	21
8.6. Operating Condition of EUT	21
8.7. Test Procedure	22
8.8. Test Results	22
9. RF FIELD STRENGTH SUSCEPTIBILITY TEST	24
9.1. Test Equipments	24
9.2. Block Diagram of Test Setup	24
9.3. Test Standard	24
9.4. Severity Levels and Performance Criterion	25
9.5. EUT Configuration	25
9.6. Operating Condition of EUT	25
9.7. Test Procedure	25
9.8. Test Results	25
10. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	27
10.1. Test Equipments	27
10.2. Block Diagram of Test Setup	27
10.3. Test Standard	27
10.4. Severity Levels and Performance Criterion	27
10.5. EUT Configuration	27
10.6. Operating Condition of EUT	27
10.7. Test Procedure	28
10.8. Test Results	28
11. SURGE TEST	29
11.1. Test Equipments	29
11.2. Block Diagram of Test Setup	29
11.3. Test Standard	29
11.4. Severity Levels and Performance Criterion	29
11.5. EUT Configuration	29
11.6. Operating Condition of EUT	29
11.7. Test Procedure	30
11.8. Test Results	30
12. INJECTED CURRENTS SUSCEPTIBILITY TEST	31
12.1. Test Equipments	31
12.2. Block Diagram of Test Setup	31
12.3. Test Standard	31
12.4. Severity Levels and Performance Criterion	31
12.5. EUT Configuration	31
12.6. Operating Condition of EUT	32
12.7. Test Procedure	32
12.8. Test Results	32
13. MAGNETIC FIELD IMMUNITY TEST	33
13.1. Test Equipments	33
13.2. Block Diagram of Test Setup	33
13.3. Test Standard	33
13.4. Severity Levels and Performance Criterion	33



13.5.	EUT Configuration on Test	34
13.6.	Operating Condition of EUT	34
13.7.	Test Procedure	34
13.8.	Test Results	34
14.	VOLTAGE DIPS AND INTERRUPTIONS TEST	36
14.1.	Test Equipment	36
14.2.	Block Diagram of Test Setup	36
14.3.	Test Standard	36
14.4.	Severity Levels and Performance Criterion	36
14.5.	EUT Configuration	36
14.6.	Operating Condition of EUT	36
14.7.	Test Procedure	37
14.8.	Test Results	37
15.	PHOTOGRAPHS	38
15.1.	Photos of Radiated Emission Test (In Anechoic Chamber)	38
15.2.	Photos of Electrostatic Discharge Immunity Test	39
16.	PHOTOS OF THE EUT	40

TEST REPORT VERIFICATION

Applicant : NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE
REKLAM SAN. TIC. LTD. STI.
Manufacturer : NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE
REKLAM SAN. TIC. LTD. STI.
EUT Description : HAND-HELD DETECTOR

(A) Model No. : ULTRA SCANNER
(B) Trademark : N/A
(C) Serial No. : N/A
(D) Power Supply : DC 9V
(E) Test Voltage : DC 9V From Battery

Measurement Standard Used:

EN 61326-1: 2006

EN 61326-2: 2006


(IEC 61000-4-2:2008; IEC 61000-4-3:2006+A1:2007+A2:2010; IEC 61000-4-8:2009)

The device described above is tested by Shenzhen Certification Technology Service Co., Ltd. to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The test results are contained in this test report and Shenzhen Certification Technology Service Co., Ltd. is assumed full responsibility for the accuracy and completeness of test. Also, this report shows that the EUT is technically compliant with the EN 61326-1 and EN 61326-2 requirements.


This report applies to above tested sample only.

Report of date.....: March 22, 2013

Tested by (name + signature).....: Reak Yang



Supervised by (name + signature).....: Nina Wang



Approved by (name + signature).....: Simple Guan



1. SUMMARY OF STANDARDS AND RESULTS

1.1. Description of Standards and Results

The EUT have been tested according to the applicable standards as referenced below.

EMISSION				
Description of Test Item	Standard	Limits		Results
Conducted disturbance at mains terminals	EN 61326-1: 2010	Class B		N/A
Conducted disturbance at telecommunication port	EN 61326-1: 2010	Class B		N/A
Radiated disturbance	EN 61326-1: 2010	Class B		PASS
Harmonic current emissions	EN61000-3-2:2006+ A1:2009+A2:2009	Class A		N/A
Voltage fluctuations & flicker	EN 61000-3-3:2008	Section 5		N/A
IMMUNITY (EN 61326-2: 2006)				
Description of Test Item	Basic Standard	Performance Criteria	Observation Criteria	Results
Electrostatic discharge (ESD)	IEC 61000-4-2:2008	B	B	PASS
Radio-frequency, Continuous radiated disturbance	IEC 61000-4-3:2006+ A1:2007+A2:2010	A	A	PASS
Electrical fast transient (EFT)	IEC 61000-4-4:2012	B	N/A	N/A
Surge (Input a.c. power port)	IEC 61000-4-5:2005	B	N/A	N/A
Surge(Telecommunication port)		B	N/A	N/A
Radio-frequency,Continuous conducted disturbance	IEC 61000-4-6:2008	A	N/A	N/A
Power frequency magnetic field	IEC 61000-4-8:2009	A	A	PASS
Voltage dips, >95% reduction	IEC 61000-4-11:2004	B	N/A	N/A
Voltage dips, 30% reduction		C	N/A	N/A
Voltage interruptions		C	N/A	N/A
N/A is an abbreviation for Not Applicable.				

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description : HAND-HELD DETECTOR

Model Number : ULTRA SCANNER

Trademark : N/A

Applicant : NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE
REKLAM SAN. TIC. LTD. STI.

Address : SIVATYOLU CAD. SAKIZ SOK. NO4 SANCAKTEPE
ISTANBUL TURKEY

Manufacturer : NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE
REKLAM SAN. TIC. LTD. STI.

Address : SIVATYOLU CAD. SAKIZ SOK. NO4 SANCAKTEPE
ISTANBUL TURKEY

Sample Type : Prototype production

2.2. Tested Supporting System Details

No.	Description	Manufacturer	Model	Serial Number
1.	N/A	N/A	N/A	N/A

Signal Cable Description of the above Support Units					
No.	Port Name	Cable	Length	Shielded (Yes or No)	Detachable (Yes or No)
1	N/A	N/A	N/A	N/A	N/A

2.3. Block Diagram of connection between EUT and simulators

For EMI Tests



For EMS Tests



✖ **EUT: HAND-HELD DETECTOR**

2.4. Test Facility

2.4.1. Laboratory Name:

Shenzhen Certification Technology Service Co., Ltd.

2.4.2. Site Location :

2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China

2.4.3. Test facility:

JAN 13, 2012 File on Federal Communication Commission
Registration Number:197647

October 11, 2011 Certificated by IC
Registration Number: 8528B

August 4, 2010 Certificated by CNAS
Registration Number: L4656

NOV. 17, 2008 Accredited by SGS
Registration Number: SWL-017

NOV. 18, 2008 Accredited by NEMKO
Registration Number: 17025

2.5. Measurement Uncertainty

(95% confidence levels, k=2)


Test Item	Uncertainty
Uncertainty for Conduction emission test	2.50dB
Uncertainty for Radiation Emission test	3.04 dB (Distance: 3m Polarize: V)
	3.02 dB (Distance: 3m Polarize: H)
Uncertainty for Flicker test	0.05%
Uncertainty for Harmonic test	1.8%
Uncertainty for C/S Test	1.30dB
Uncertainty for R/S Test	0.88dB
Uncertainty for test site temperature and humidity	0.6°C
	3%

3. CONDUCTED DISTURBANCE AT MAINS TERMINALS TEST

3.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESCI	100843	Oct.31, 12	1 Year
2.	L.I.S.N.#1	Schwarzbeck	NSLK8126	8126466	Oct.31, 12	1 Year
3.	L.I.S.N.#2	Kyoritsu	KNW-242C	8-1920-1	Oct.31, 12	1 Year
4.	Terminator	Hubersuhner	50Ω	No. 1	Oct.31, 12	1 Year
5.	RF Cable	Schwarzbeck	9111505/200	5995-12-161-6890#	Oct.31, 12	1 Year
6.	Coaxial Switch	Schwarzbeck	CX-210	N/A	Oct.31, 12	1 Year
7.	Pulse Limiter	Schwarzbeck	VTSD9516F	9618	Oct.31, 12	1 Year

3.2. Block Diagram of Test Setup

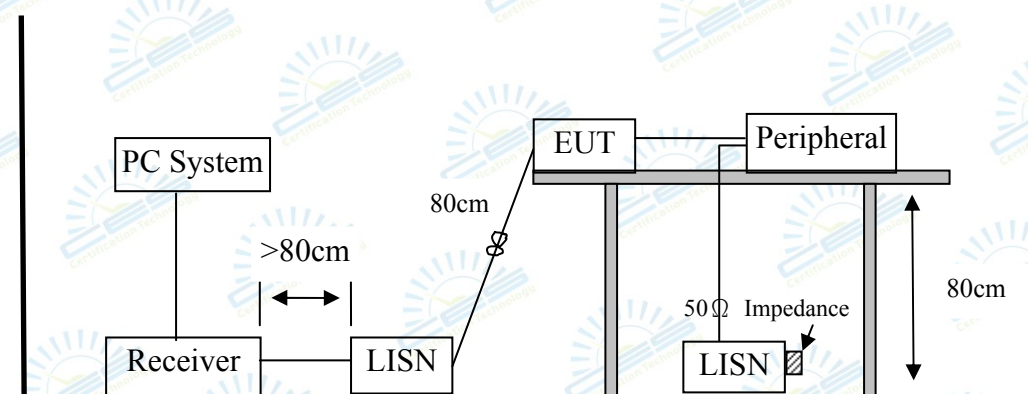

3.3. Test Standard

EN 61326-1: 2010, Class B

3.4. Power Line Conducted Disturbance at Mains Terminals Limit

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150kHz ~ 500kHz	66 ~ 56*	56 ~ 46*
500kHz ~ 5MHz	56	46
5MHz ~ 30MHz	60	50

Notes: 1. Emission level=Read level+LISN factor-Preamplifier factor+Cable loss

2 * Decreasing linearly with logarithm of frequency.

3. The lower limit shall apply at the transition frequencies.

3.5. EUT Configuration on Test

The following equipments are installed on Conducted Emission Test to meet EN 61326-1 requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.5.1. Support Equipment : As Tested Supporting System Detail, in Section 2.2.

3.6. Operating Condition of EUT

3.6.1. Setup the EUT and simulator as shown as Section 3.2.

3.6.2. Turned on the power of all equipment.

3.6.3. Let HAND-HELD DETECTOR (EUT) work in test mode (Working) and measure it.

3.7. Test Procedure

The EUT was placed on a non-metallic table, 80cm above the ground plane. The EUT Power connected to the power mains through a line impedance stabilization network (L.I.S.N. 1#). This provided a 50-ohm coupling impedance for the EUT (Please refer to the block diagram of the test setup and photographs). The other peripheral devices power cord connected to the power mains through a line impedance stabilization network (L.I.S.N.#2). Both sides of power line were checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipments and all of the interface cables were changed according to EN 61326-1 Class B on conducted Disturbance test.

The bandwidth of test receiver (R & S ESHS20) is set at 10kHz.

The frequency range from 150kHz to 30MHz is checked. The test results are reported and test results for Conducted Disturbance Test on Section 3.8.

3.8. Conducted Disturbance at Mains Terminals Test Results

EUT Supply by DC Power, So it not applicable.

4. RADIATED DISTURBANCE TEST


4.1. Test Equipments

4.1.1. For frequency range 30MHz~1000MHz (At Semi Anechoic Chamber)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1	Test Receiver	Rohde&Schwarz	ESCI	101165	Oct. 31, 12	1 Year
2	Amplifier	Schwarzbeck	BBV9743	9743-019	Feb. 10, 13	1 Year
3	Bilog Antenna	Schwarzbeck	VULB 9168	9168-438	Oct. 31, 12	1 Year
4	RF Cable	Schwarzbeck	AK9515E	95891-2m	Oct. 31, 12	1 Year
5	RF Cable	Schwarzbeck	AK9515E	95891-11m	Oct. 31, 12	1 Year
6	RF Cable	Schwarzbeck	AK9515E	95891-0.5m	Oct. 31, 12	1 Year

4.2. Block Diagram of Test Setup

4.2.1. In Semi Anechoic Chamber (3m) Test Setup Diagram for 30MHz~1000MHz

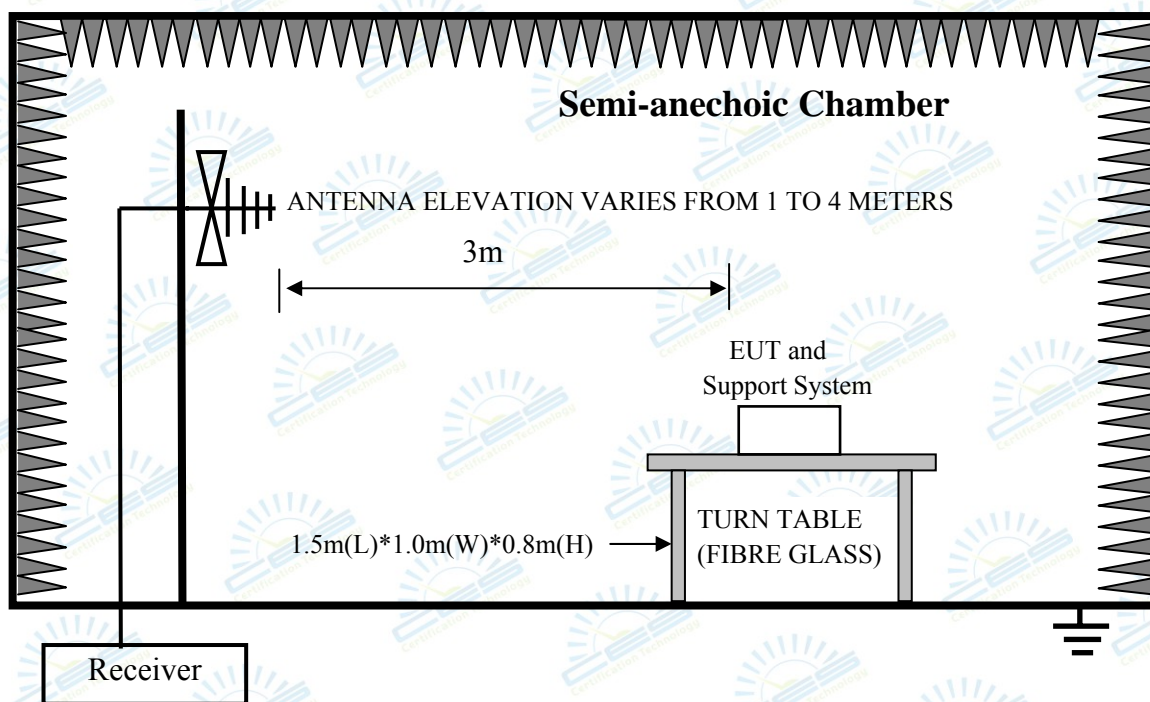

4.3. Test Standard

EN 61326-1: 2010, Class B

4.4. Radiated Disturbance Limit

All emanations from a Class B computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB μ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

- Note:
- (1) Emission level = Read level+Antenna Factor-Preamplifier Factor +Cable Loss
 - (2) The lower limit shall apply at the transition frequencies.
 - (3) Distance refers to the distance in meters between the test instrument antenna and the closed point of any part of the E.U.T.

4.5. EUT Configuration on Test

The EN 61326-1 regulations test method must be used to find the maximum emission during Radiated Disturbance test. The configuration of EUT is same as used in Conducted Disturbance test. Please refer to Section 3.5.

4.6. Operating Condition of EUT

- 4.6.1. Setup the EUT and simulator as shown as Section 4.2.
- 4.6.2. Turned on the power of all equipment.
- 4.6.3. Let HAND-HELD DETECTOR (EUT) work in test mode (Working) and measure it.

4.7. Test Procedure

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. An antenna was located 3m & 3m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT were rotated and the antenna height was varied between 1m and 4m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipments and all the interface cables were changed according to EN 61326-1 on Radiated Disturbance test.

The bandwidth setting on the test receiver (ROHDE&SCHWARZ TEST RECEIVER ESCI) is 120 kHz.

The resolution bandwidth of the Agilent Spectrum Analyzer E4446A was set at 1MHz. (For above 1GHz)

The frequency range from 30MHz to 1000MHz was pre-scanned with a peak detector and all final readings of measurement from Test Receiver are Quasi-Peak values.

The frequency range from 1GHz to 6GHz was checked with peak and average detector, measurement distance is 3m in 3m chamber.

Finally, selected operating situations at Semi Anechoic Chamber measurement, all the test results are listed in section 4.8.

4.8. Radiated Disturbance Test Results

PASS. (All emissions not reported below are too low against the prescribed limits.)

The EUT with the following test mode was tested and read QP values and average values, the test results are listed in next pages.


Temperature: 24℃ Humidity: 56%

The details of test mode is as follows :

No.	Test Mode
1.	Working



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

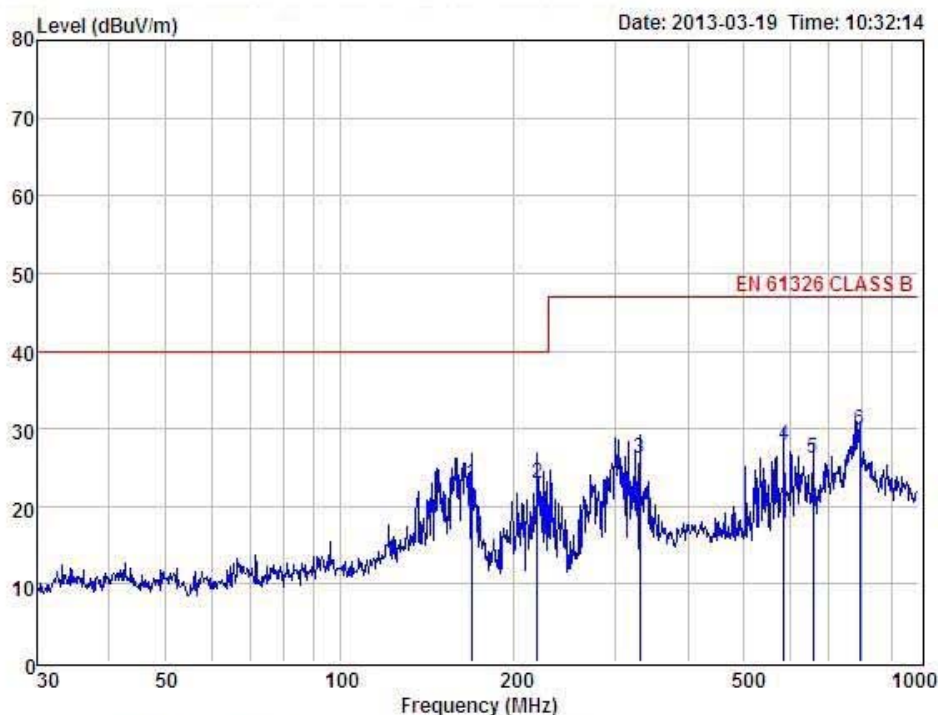


Condition : EN 61326 CLASS B 3m POL: VERTICAL
EUT : HAND-HELD DETECTOR
Model No : ULTRA SCANNER
Test Mode : Working
Power : DC 9V
Test Engineer : Reak
Remark :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	169.01	35.94	13.37	26.92	0.50	22.89	40.00	-17.11	QP
2	219.84	38.67	10.64	27.07	0.67	22.91	40.00	-17.09	QP
3	330.19	39.04	13.52	27.24	0.76	26.08	47.00	-20.92	QP
4	584.79	36.79	18.01	27.79	0.93	27.94	47.00	-19.06	QP
5	656.53	33.71	19.16	27.78	1.09	26.18	47.00	-20.82	QP
6	790.62	35.53	20.64	27.66	1.39	29.90	47.00	-17.10	QP

Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss



Shenzhen Certification Technology Service Co., Ltd.
2F, Building B, East Area of Nanchang Second Industrial Zone,
Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China
Tel: 4006786199 FAX: +86-755-26736857
Website: <http://www.cessz.com> Email: Service@cessz.com

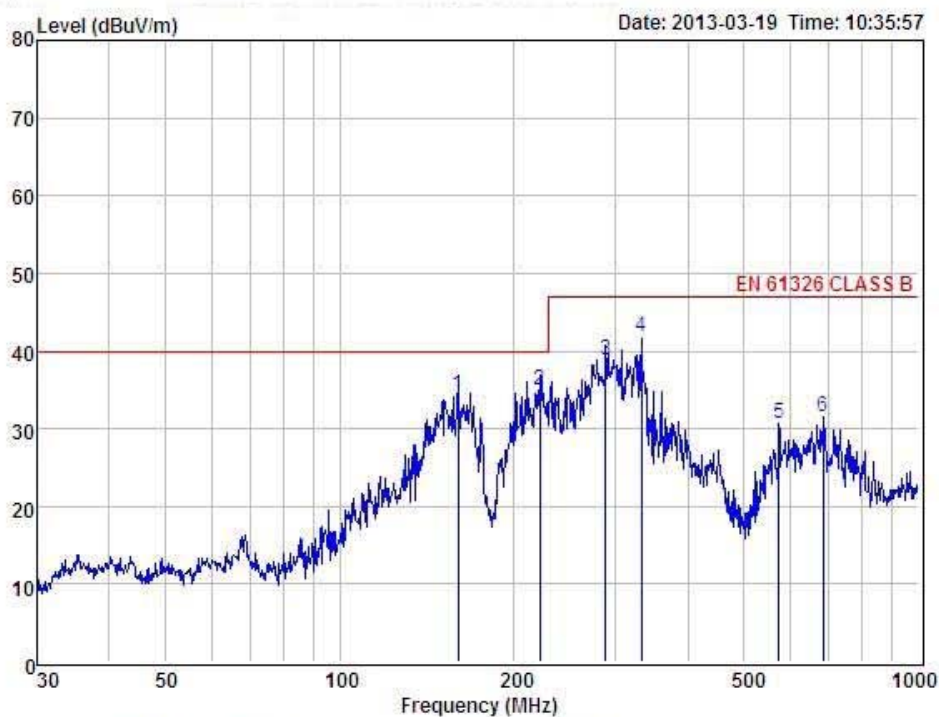

Condition : EN 61326 CLASS B 3m POL: HORIZONTAL
EUT : HAND-HELD DETECTOR
Model No : ULTRA SCANNER
Test Mode : Working
Power : DC 9V
Test Engineer : Reak
Remark :

Item	Freq MHz	Read Level dBuV	Antenna Factor dB	Preamp Factor dB	Cable Loss dB	Level dBuV	Limit dBuV	Margin dBuV	Remark
1	160.35	46.59	14.14	26.91	0.44	34.26	40.00	-5.74	QP
2	221.39	50.55	10.75	27.07	0.68	34.91	40.00	-5.09	QP
3	287.99	52.78	12.54	27.17	0.66	38.81	47.00	-8.19	QP
4	332.52	54.72	13.55	27.24	0.79	41.82	47.00	-5.18	QP
5	574.63	39.35	17.81	27.76	1.27	30.67	47.00	-16.33	QP
6	684.75	38.29	19.50	27.77	1.42	31.44	47.00	-15.56	QP


Remark: Level = Read Level + Antenna Factor - Preamp Factor + Cable Loss

5. HARMONIC CURRENT TEST

5.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Harmonics&Flicker Analyser	Voltech	PM6000	200006700495	Nov. 1, 12	1 Year

5.2. Block Diagram of Test Setup

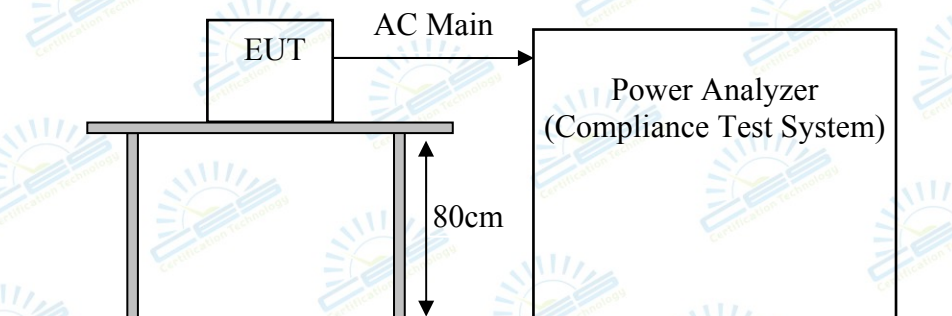

5.3. Test Standard

EN 61000-3-2: 2006+A1:2009+A2:2009; Class A

5.4. Limits of Harmonic Current

Limits for Class D Equipment		
Harmonic order (n)	Maximum permissible harmonic current per watt (mA/W)	Maximum permissible harmonic current (A)
3	3.4	0.23
5	1.9	1.14
7	1.0	0.77
9	0.5	0.40
11	0.35	0.33
13	0.30	0.21
15≤n≤39 (odd harmonic only)	3.85/n	0.15×15/n

Limits for Class A equipment	
Harmonic order n	Maximum permissible Harmonic current A
Odd harmonics	
3	2,30
5	1,14
7	0,77

9 11 13 $15 \leq n \leq 39$	0,40 0,33 0,21 $0,15 \frac{15}{n}$
Even harmonics	
2 4 6 $8 \leq n \leq 40$	1,08 0,43 0,30 $0,23 \frac{8}{n}$

Limits for Class C equipment	
Harmonic order	Maximum permissible harmonic current expressed as a percentage of the input current at the fundamental frequency
n	%
2	2
3	$30 \cdot \lambda^*$
5	10
7	7
9	5
$11 \leq n \leq 39$ (odd harmonics only)	3
* λ is the circuit power factor	

5.5. Operating Condition of EUT

Same as Section 3.6. except the test setup replaced by Section 5.2.

5.6. Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the maximum harmonic components under normal operating conditions for each successive harmonic component in turn. The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the necessary for the EUT to be exercised.

5.7. Test Results

EUT Supply by DC Power, So it not applicable.

6. VOLTAGE FLUCTUATIONS & FLICKER TEST

6.1. Test Equipment

Same as Section 5.1.

6.2. Block Diagram of Test Setup

Same as Section 5.2.

6.3. Test Standard

EN 61000-3-3:2008

6.4. Limits of Voltage Fluctuation and Flick

Test Item	Limit	Note
P_{st}	1.0	P_{st} means Short-term flicker indicator
P_{lt}	0.65	P_{lt} means long-term flicker indicator
T_{dt}	0.2	T_{dt} means maximum time that d_t exceeds 3%
$d_{max}(\%)$	4%	d_{max} means maximum relative voltage change.
$d_c(\%)$	3%	d_c means relative steady-state voltage change.

6.5. Operating Condition of EUT

Same as Section 5.5.

6.6. Test Procedure

The EUT was placed on the top of a wooden table 0.8 meters above the ground and operated to produce the most unfavorable sequence of voltage changes under normal conditions. During the flick measurement, the measure time shall include that part of whole operation changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

6.7. Test Results

EUT Supply by DC Power, So it not applicable.

7. IMMUNITY PERFORMANCE CRITERIA

Performance Level

The test results shall be classified in terms of the loss of function or degradation of performance of the equipment under test, relative to a performance level by its manufacturer or the requestor of the test, or the agreed between the manufacturer and the purchaser of the product.

Definition related to the performance level:

1. Based on the used product standard
2. Based on the declaration of the manufacturer, requestor or purchaser

Performance criterion A

When seen from the normal viewing distance, the EUT shall operate with no change beyond the manufacturer's specification, in flicker, colour, focus and jitter (except for the power frequency magnetic field test).

Power frequency magnetic field test

For CRT monitors, the following also applies:

The jitter shall be measured using a measuring microscope as specified in 6.6.14 of ISO 9241-3.

The jitter (in mm) shall not exceed the value $\frac{(\text{character height in mm} + 0,3) \times 2,5}{33,3}$ when the CRT monitor is immersed in a continuous magnetic field of 1A/m (r.m.s.) at one of the power frequencies of 50Hz.

Alternatively, a field of 50A/m may be applied, and a transparent graduated mask used to assess the jitter. In that case, the jitter shall not exceed 50 times the value in the above formula.

NOTE-This test level is used to simplify the measurement of jitter. Lesser values of the test level may be used if non-linearity is experienced, due to, for example, saturation of screening material.

The EUT shall be tested in two positions, both perpendicular to the magnetic field.

Performance criterion B

Screen disturbances during the application of the test are permissible.

Performance criterion C


Failures which are not self-recovered after removal of the external disturbance, but which can be recovered to normal operation by reset or reboot are permissible.

8. ELECTROSTATIC DISCHARGE IMMUNITY TEST

8.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	HAEFLY	PESD1610	H310546	Nov. 1, 12	1 Year

8.2. Block Diagram of Test Setup

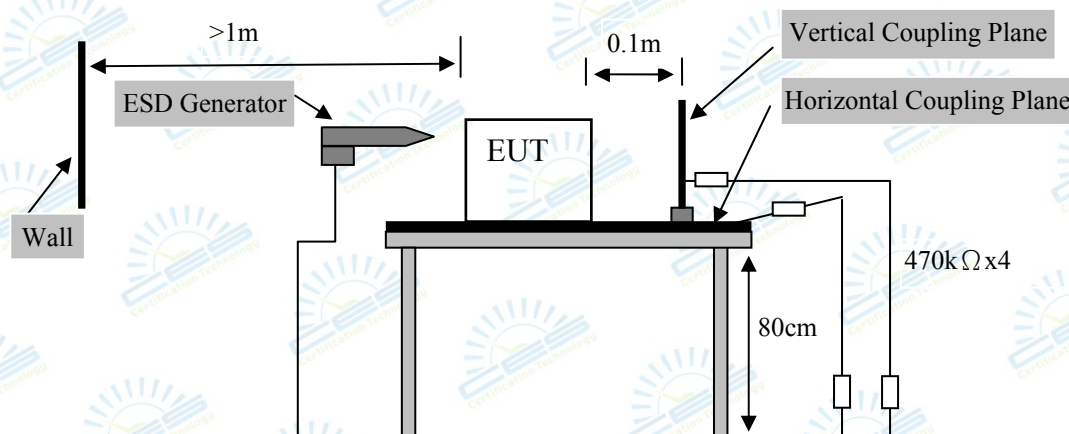

8.3. Test Standard

EN 61326-2: 2006(IEC 61000-4-2: 2008)
(Severity Level 1 & 2 & 3 for Air Discharge at 2 kV & 4 kV & 8kV,
Severity Level 1 & 2 for Contact Discharge at 2 kV & 4kV)

8.4. Severity Levels and Performance Criterion

8.4.1. Severity level

Level	Test Voltage Contact Discharge (kV)	Test Voltage Air Discharge (kV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X	Special	Special

8.4.2. Performance criterion : **B**

8.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

8.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 8.2.

8.7. Test Procedure

8.7.1. Air Discharge:

The test was applied on non-conductive surfaces of EUT. The round discharge tip of the discharge electrode was approached as fast as possible to touch the EUT. After each discharge, the discharge electrode was removed from the EUT. The generator was re-triggered for a new single discharge and repeated 20 times for each pre-selected test point. This procedure was repeated until all the air discharge completed

8.7.2. Contact Discharge:

All the procedure was same as Section 8.7.1. except that the generator was re-triggered for a new single discharge and repeated 50 times for each pre-selected test point. The tip of the discharge electrode was touching the EUT before the discharge switch was operated.

8.7.3. Indirect discharge for horizontal coupling plane:

At least 20 single discharges were applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

8.7.4. Indirect discharge for vertical coupling plane:

At least 20 single discharges were applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, was placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges were applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

8.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next page.

Electrostatic Discharge Test Results

Applicant	:	NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE REKLAM SAN. TIC. LTD. STI.	Test Date	:	March 22, 2013
EUT	:	HAND-HELD DETECTOR	Temperature	:	24°C
M/N	:	RSX-035	Humidity	:	56%
Test Voltage	:	DC 9V From Battery	Test Mode	:	Working
Test Engineer	:	Reak	Pressure	:	100.6KPa
Required Performance	:	B	Actual Performance	:	B

Air Discharge: $\pm 2\text{kV}$ $\pm 4\text{kV}$ $\pm 8\text{kV}$ # For Air Discharge each Point Positive 10 times and negative 10 times discharge.

Contact Discharge: $\pm 2\text{kV}$ $\pm 4\text{kV}$ # For Contact Discharge each point positive 25 times and negative 25 times discharge

For the time interval between successive single discharges an initial value of one second.

Discharge Voltage (kV)	Type of discharge	Dischargeable Points	Performance		Result (Pass/Fail)
			Required	Observation	
± 2	Contact	1	B	B	Pass
± 4	Contact	1	B	B	Pass
± 2	Air	2,3,4	B	B	Pass
± 4	Air	2,3,4	B	B	Pass
± 8	Air	2,3,4	B	B	Pass
± 2	HCP-Bottom	Edge of the HCP	B	B	Pass
± 2	VCP-Front	Center of the VCP	B	B	Pass
± 2	VCP-Left	Center of the VCP	B	B	Pass
± 2	VCP-Back	Center of the VCP	B	B	Pass
± 2	VCP-Right	Center of the VCP	B	B	Pass
± 4	HCP-Bottom	Edge of the HCP	B	B	Pass
± 4	VCP-Front	Center of the VCP	B	B	Pass
± 4	VCP-Left	Center of the VCP	B	B	Pass
± 4	VCP-Back	Center of the VCP	B	B	Pass
± 4	VCP-Right	Center of the VCP	B	B	Pass

Discharge Points Description

<u>1</u>	Metal	<u>5</u>	
<u>2</u>	Slots	<u>6</u>	
<u>3</u>	Button	<u>7</u>	
<u>4</u>	LED	<u>8</u>	

Test Equipment: ESD Tester (PESD1610)

Remark:


Discharge was considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).

9. RF FIELD STRENGTH SUSCEPTIBILITY TEST

9.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	Marconi	2031B	11606/058	Oct. 31, 12	1 Year
2.	Amplifier	A&R	100W/1000M1	17028	NCR	NCR
3.	Isotropic Field Monitor	A&R	FM7004	0325983	NCR	NCR
4.	Isotropic Field Probe	A&R	FL7006	0325736	Oct. 31, 12	1 Year
5.	Laser Probe Interface	A&R	FL7000	325430	NCR	NCR
6.	Power Meter	Anritsu	ML2487A	6k00003262	Oct. 31, 12	1Year
7.	Power Sensor	Anritsu	MA2491A	33005	Oct. 31, 12	1Year
8.	Log-periodic Antenna	A&R	AT1080	16512	NCR	NCR

9.2. Block Diagram of Test Setup

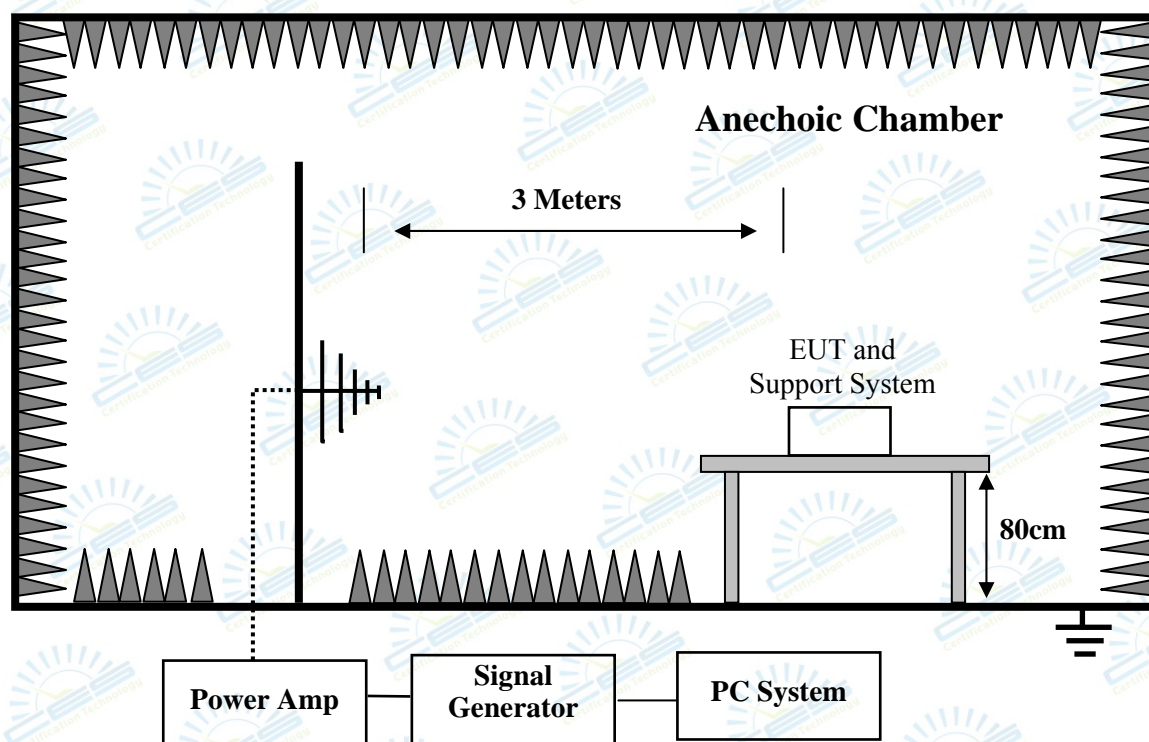

9.3. Test Standard

EN 61326-2: 2006(IEC 61000-4-3:2006+A1: 2007+A2: 2010)
(Severity Level: 2 at 3V / m)

9.4. Severity Levels and Performance Criterion

9.4.1. Severity level

Level	Test Field Strength V/m
1.	1
2.	3
3.	10
X	Special

9.4.2. Performance criterion : A

9.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

9.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 9.2.

9.7. Test Procedure

Testing was performed in a Fully anechoic chamber as recommended by IEC 61000-4-3. The EUT was placed on an 80 cm high non-conductive table located in the area of field uniformity. The radiating antenna was placed 3m in front of the EUT and Support system, and dwell time of the radiated interference was controlled by an automated, computer-controlled system. The signal source was stepped through the applicable frequency range at a rate no faster than 1% of the fundamental. The signal was amplitude modulated 80% over the frequency range 80 MHz to 1GHz at a level of 3 V/m. The dwell time was set at 3 s. Field presence was monitored during testing via a field probe placed in close proximity to the EUT. Throughout testing, the EUT was closely monitored for signs of susceptibility. The test was performed with the antennae oriented in both a horizontal and vertical polarization.

All the scanning conditions are as follows:

Condition of Test	Remarks
1. Test Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	80% amplitude modulated with a 1kHz sine wave
3. Scanning Frequency	80 - 1000 MHz
4. Sweeping time of radiated	0.0015 decade/s
5. Dwell Time	3 Sec.

9.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next page.

RF Field Strength Susceptibility Test Results


Applicant	:	NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE REKLAM SAN. TIC. LTD. STI.	Test Date	:	March 22, 2013
EUT	:	HAND-HELD DETECTOR	Temperature	:	24°C
M/N	:	RSX-035	Humidity	:	56%
Test Voltage	:	DC 9V From Battery	Pressure	:	100.6KPa
Test Engineer	:	Reak	Test Mode	:	Working
Frequency Range	:	80 MHz -1000MHz	Field Strength	:	3V/m
Required Performance	:	A	Actual Performance	:	A
Modulation: <input checked="" type="checkbox"/> AM <input type="checkbox"/> Pulse <input type="checkbox"/> none 1 kHz 80%					
Frequency Rang :80 MHz -1000MHz					
Steps	1%				
	Horizontal		Vertical		Result
	Required	Observation	Required	Observation	(Pass / Fail)
Front	A	A	A	A	Pass
Right	A	A	A	A	Pass
Rear	A	A	A	A	Pass
Left	A	A	A	A	Pass
Test Equipment : 1. Signal Generator : Marconi 2031B 2. Power Amplifier : A&R 500A/100;100W/1000M. 3. Power Antenna : A&R AT-1080. 4. Field Monitor : A&R FM7004.					
Remark: No function loss					

10. ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

10.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Burst Tester	3ctest	EFT-4001G	EC0461015	Oct. 31, 12	1 Year

10.2. Block Diagram of Test Setup

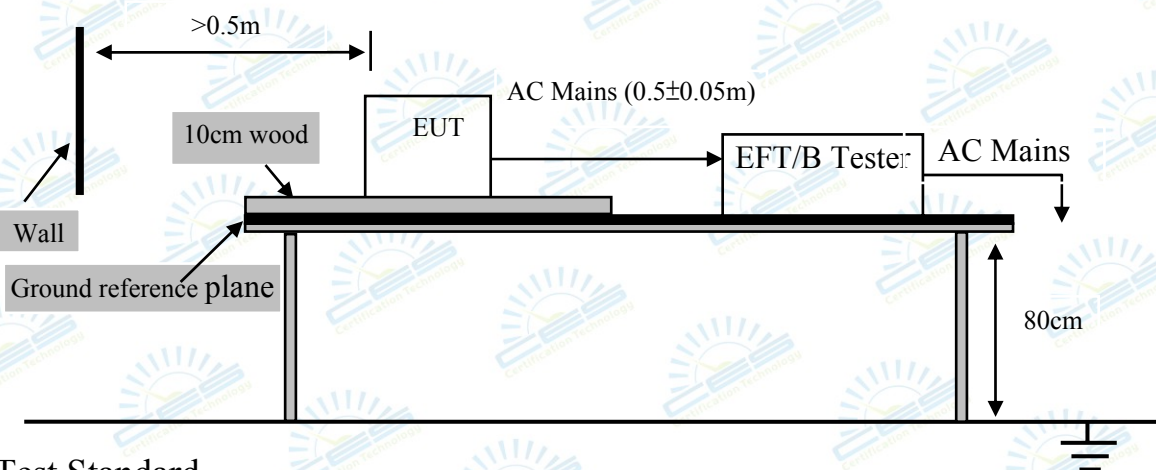

10.3. Test Standard

EN 61326-2: 2006(IEC 61000-4-4:2012)
(Severity Level 2 at 1kV)

10.4. Severity Levels and Performance Criterion

10.4.1. Severity level

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 kV	0.25 kV
2.	1 kV	0.5 kV
3.	2 kV	1 kV
4.	4 kV	2 kV
X	Special	Special

10.4.2. Performance criterion : **B**

10.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

10.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 10.2.

10.7. Test Procedure

The EUT and its simulators were placed on the ground reference plane and were insulated from it by a wood support $0.1\text{m} \pm 0.01\text{m}$ thick. The ground reference plane was $1\text{m} \times 1\text{m}$ metallic sheet with 0.65mm minimum thickness. This reference ground plane was project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane was more than 0.5m. All cables to the EUT was placed on the wood support, cables not subject to EFT/B was routed as far as possible from the cable under test to minimize the coupling between the cables.

10.7.1. For input and AC power ports:

The EUT was connected to the power mains by using a coupling device that couples the EFT interference signal to AC power lines. Both positive transients and negative transients of test voltage were applied during compliance test and the duration of the test can't less than 1min.

10.7.2. For signal lines and control lines ports:

It's unnecessary to test.

10.7.3. For DC input and DC output power ports:

It's unnecessary to test.

10.8. Test Results


EUT Supply by DC Power, So it not applicable.

11. SURGE TEST

11.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge CDN	3ctest	SGN-5010G	EC5591004	Oct. 31, 12	1 Year
2.	Surge Generator	3ctest	SG-5006G	EC5581006	Oct. 31, 12	1 Year

11.2. Block Diagram of Test Setup

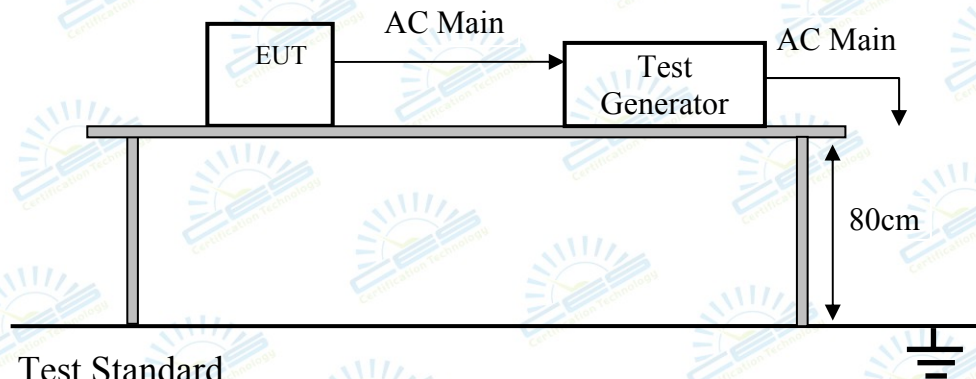

11.3. Test Standard

EN 61326-2: 2006 (IEC 61000-4-5: 2005)
(Severity Level: Line to Line was Level 2 at 1kV)

11.4. Severity Levels and Performance Criterion

11.4.1. Severity level

Severity Level	Open-Circuit Test Voltage kV
1	0.5
2	1.0
3	2.0
4	4.0
*	Special

11.4.2. Performance criterion: **B**

11.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

11.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 11.2

11.7. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 11.2.
- 2) For line-to-line coupling mode, provide a 1kV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points, and for active line / neutral lines to ground are same except test level is 2kV.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are applied during test.
- 4) Different phase angles are done individually.
- 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

11.8. Test Results


EUT Supply by DC Power, So it not applicable.

12. INJECTED CURRENTS SUSCEPTIBILITY TEST

12.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	Marconi	GDN6000	11606/058	Oct. 31, 12	1 Year
2.	Amplifier	AR	25A250A	19152	NCR	NCR
3.	CDN	FCC	FCC-801-M3-25	107	Oct. 31, 12	1 Year
4.	PC	N/A	N/A	N/A	N/A	N/A
5.	RF Cable	JINGCHENG	KLMR400	No.1/2	NCR	NCR

12.2. Block Diagram of Test Setup

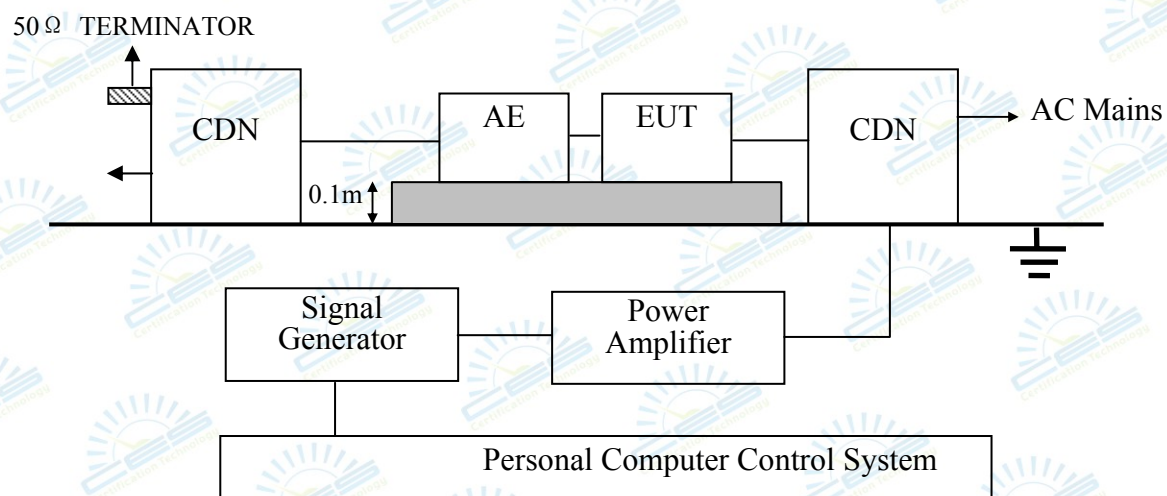

12.3. Test Standard

EN 61326-2: 2006 (IEC61000-4-6: 2008)

(Severity Level 2 at 3V (r.m.s.) and frequency is from 0.15MHz to 80MHz)

12.4. Severity Levels and Performance Criterion

12.4.1. Severity level

Level	Voltage Level (e.m.f.) V
1.	1
2.	3
3.	10
X	Special

12.4.2. Performance criterion: A

12.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

12.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 12.2.

12.7. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 12.2.
- 2) Let the EUT work in test mode and test it.
- 3) The EUT are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 10 and 30 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 0.150MHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1kHz sine wave.
- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

12.8. Test Results


EUT Supply by DC Power, So it not applicable.

13. MAGNETIC FIELD IMMUNITY TEST

13.1. Test Equipments

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic Field Tester	HEAFELY	MAG100.1	083858-10	Oct. 31, 12	1 Year

13.2. Block Diagram of Test Setup

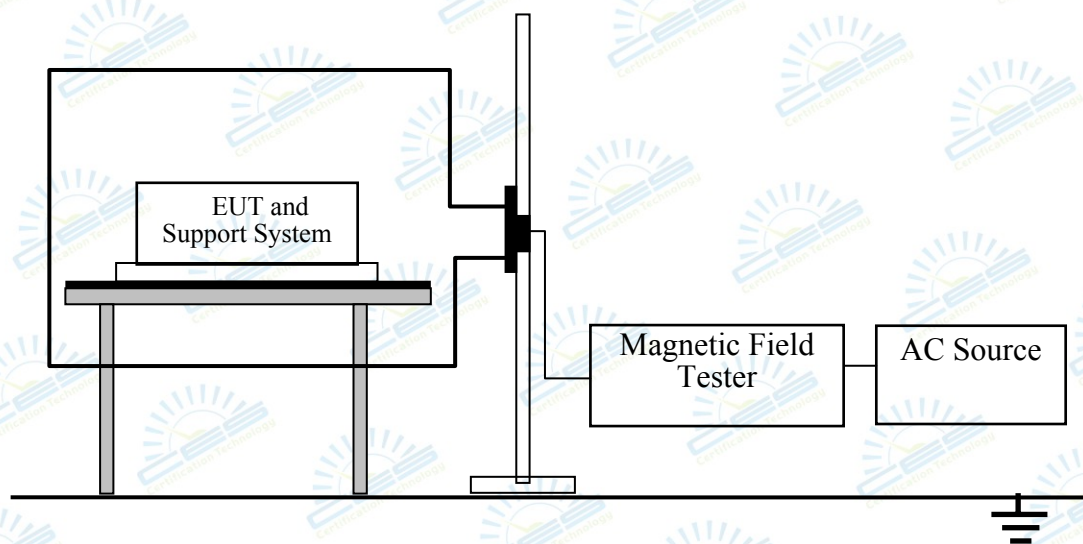

13.3. Test Standard

EN 61326-2: 2006 (IEC 61000-4-8: 2009)
(Severity Level 1 at 1A/m)

13.4. Severity Levels and Performance Criterion

13.4.1. Severity level

Level	Magnetic Field Strength A/m
1.	1
2.	3
3.	10
4.	30
5.	100
X.	Special

13.4.2. Performance criterion : A

13.5. EUT Configuration on Test

The configurations of EUT are listed in Section 3.5.

13.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 13.2.

13.7. Test Procedure

The EUT was subjected to the test magnetic field by using the induction coil of standard dimensions (1m*1m) and shown in Section 13.2. The induction coil was then rotated by 90° in order to expose the EUT to the test field with different orientations.

13.8. Test Results

PASS.

The EUT was tested and all the test results are listed in next page.

Magnetic Field Immunity Test Results


Applicant	:	NOKTA MUHENDISLIK INS. ELEK. PLAS. GIDA VE REKLAM SAN. TIC. LTD. STI.	Test Date	:	March 22, 2013
EUT	:	HAND-HELD DETECTOR	Temperature	:	24°C
M/N	:	RSX-035	Humidity	:	56%
Test Voltage	:	DC 9V From Battery	Test Mode	:	Working
Test Engineer	:	Reak	Pressure	:	100.5KPa
Required Performance	:	A	Actual Performance	:	A
Test Level	Testing Duration	Coil Orientation	Required	Observation	Result (Pass/Fail)
1A/m	5 min / coil	X	A	A	PASS
1A/m	5 min / coil	Y	A	A	PASS
1A/m	5 min / coil	Z	A	A	PASS
Test Equipment :Magnetic Field Tester9 (MAG100.1)					
Remark: No function loss.					

14. VOLTAGE DIPS AND INTERRUPTIONS TEST

14.1. Test Equipment

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Main Interference Simulator	3ctest	VDG-1105G	EC0171002	Oct. 31, 12	1 Year

14.2. Block Diagram of Test Setup

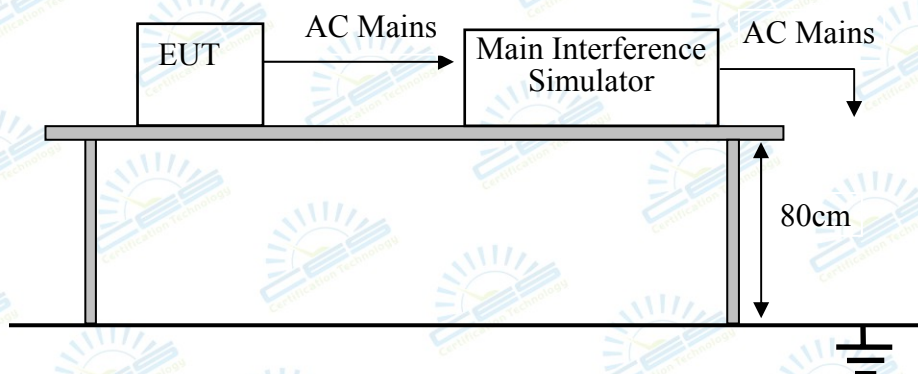

14.3. Test Standard

EN 61326-2: 2006 (IEC 61000-4-11: 2004)

14.4. Severity Levels and Performance Criterion

14.4.1. Severity level

Test Level $\%U_T$	Voltage dip and short interruptions $\%U_T$	Performance Criterion	Duration (in period)
0	100	C	250
0	100	B	0.5
30	70	C	25

14.4.2. Performance criterion : B & C

14.5. EUT Configuration

The configurations of EUT are listed in Section 3.5.

14.6. Operating Condition of EUT

Same as Conducted Emission test that is listed in Section 3.6. except the test set up replaced by Section 14.2.



14.7. Test Procedure



- 1) The EUT and test generator were setup as shown on Section 14.2.
- 2) The interruption is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

14.8. Test Results

EUT Supply by DC Power, So it not applicable.

15. PHOTOGRAPHS

15.1. Photos of Radiated Emission Test (In Anechoic Chamber)

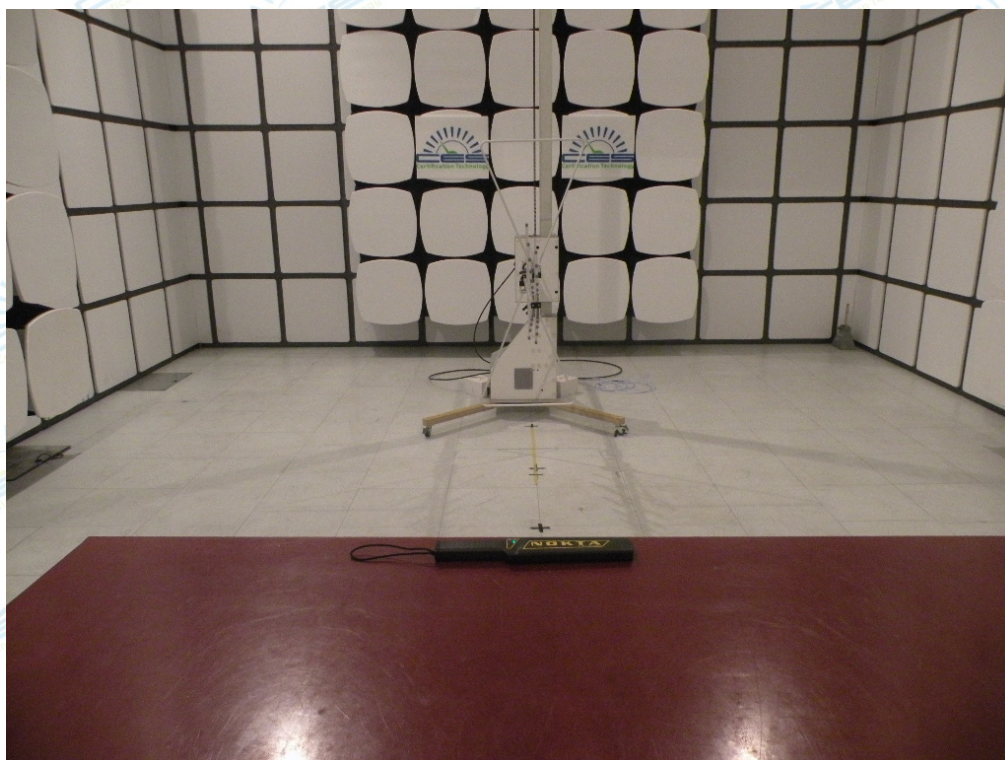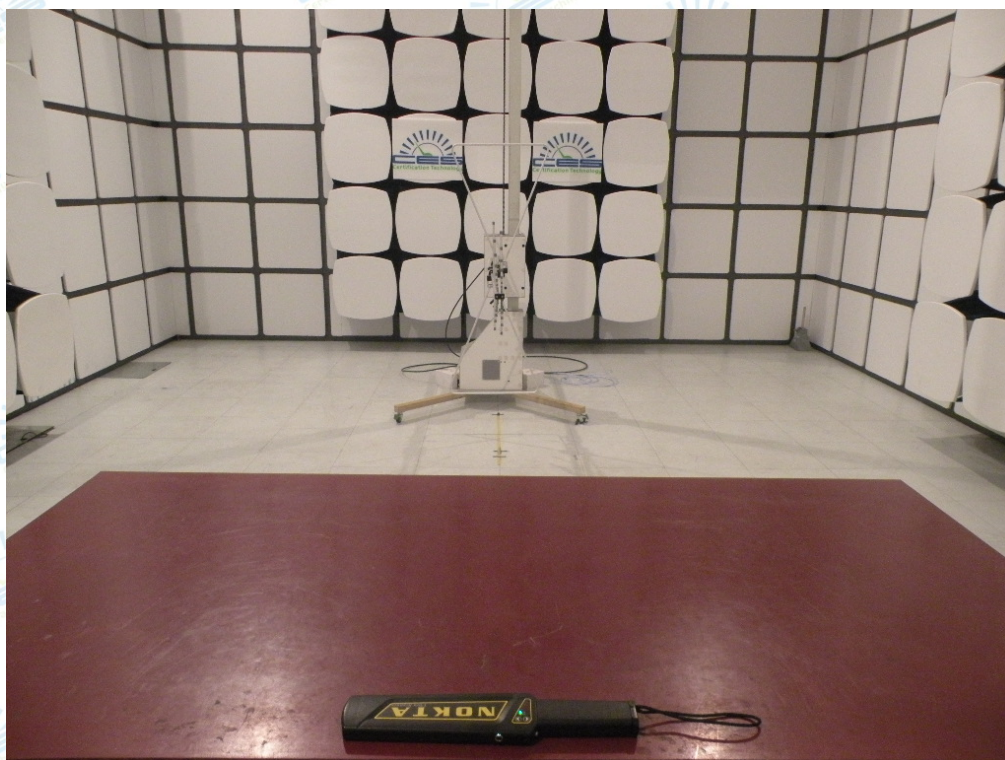

15.2. Photos of Electrostatic Discharge Immunity Test




16. PHOTOS OF THE EUT



Front View



Rear View

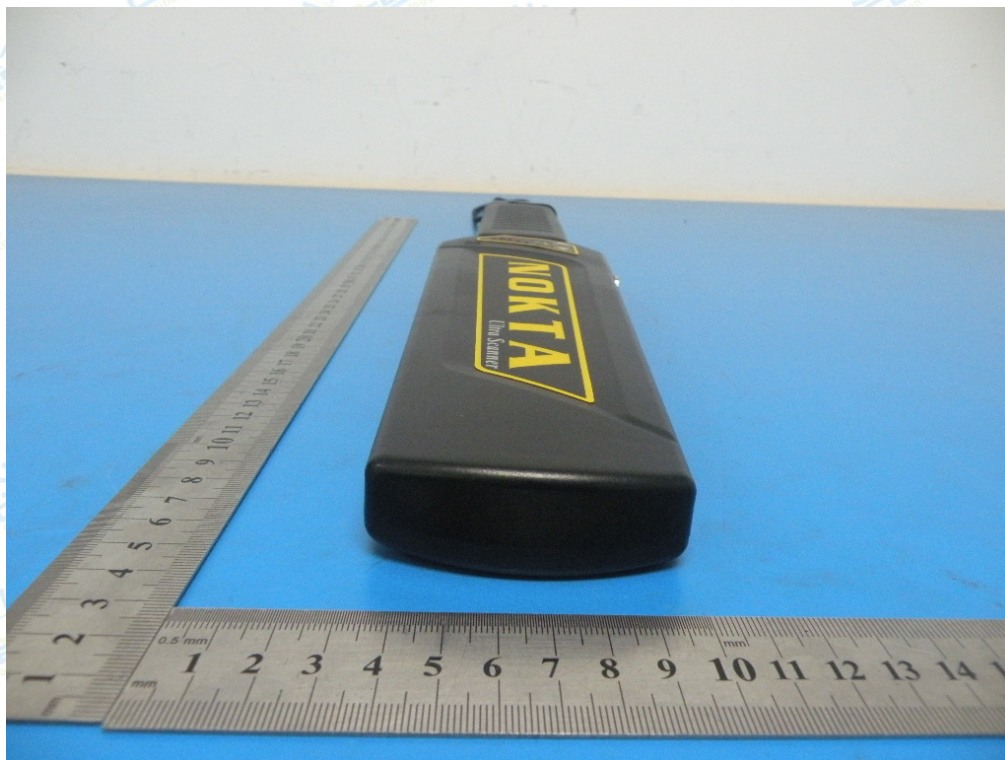

Top View




Bottom View




Left View




Right View

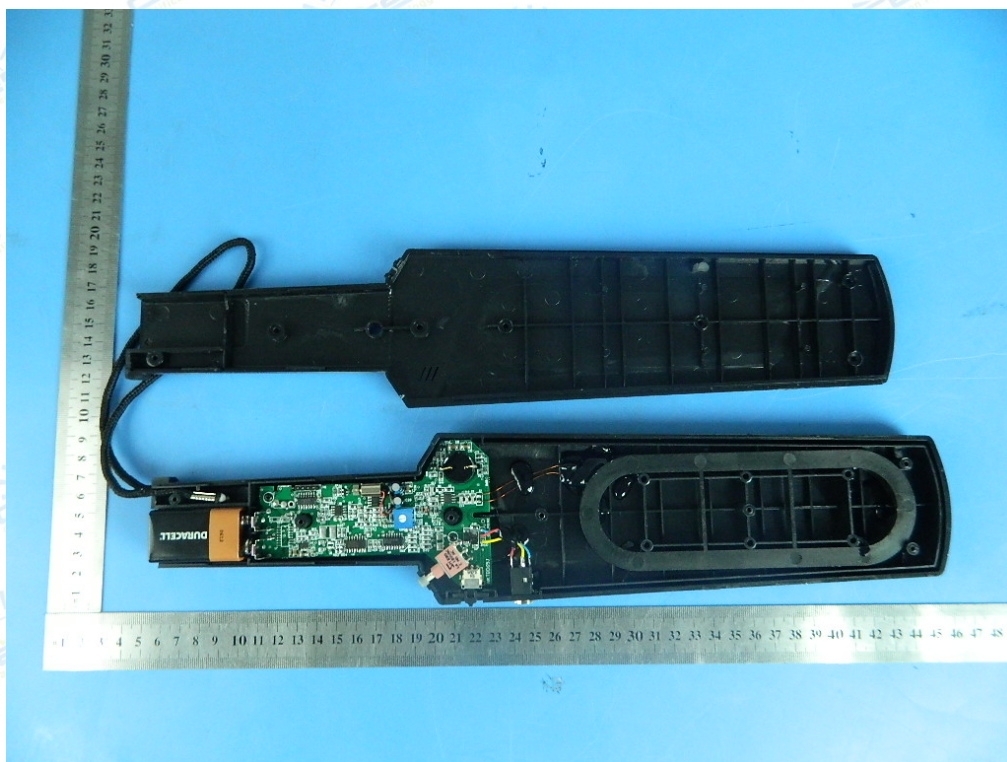

Inside View

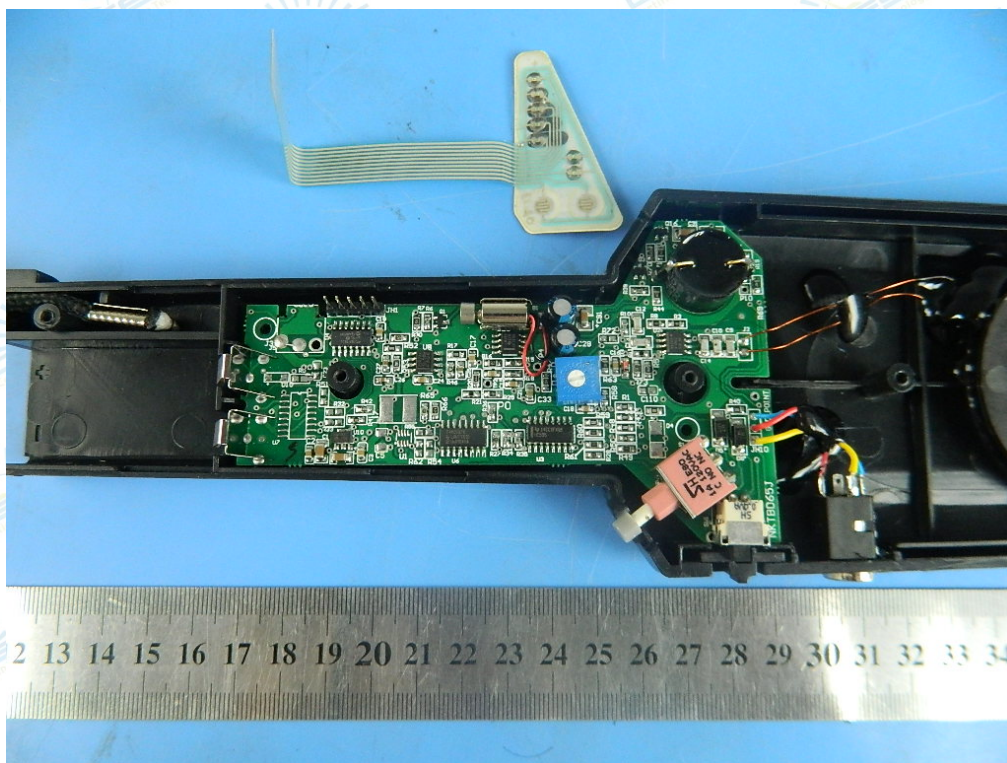

Inside View

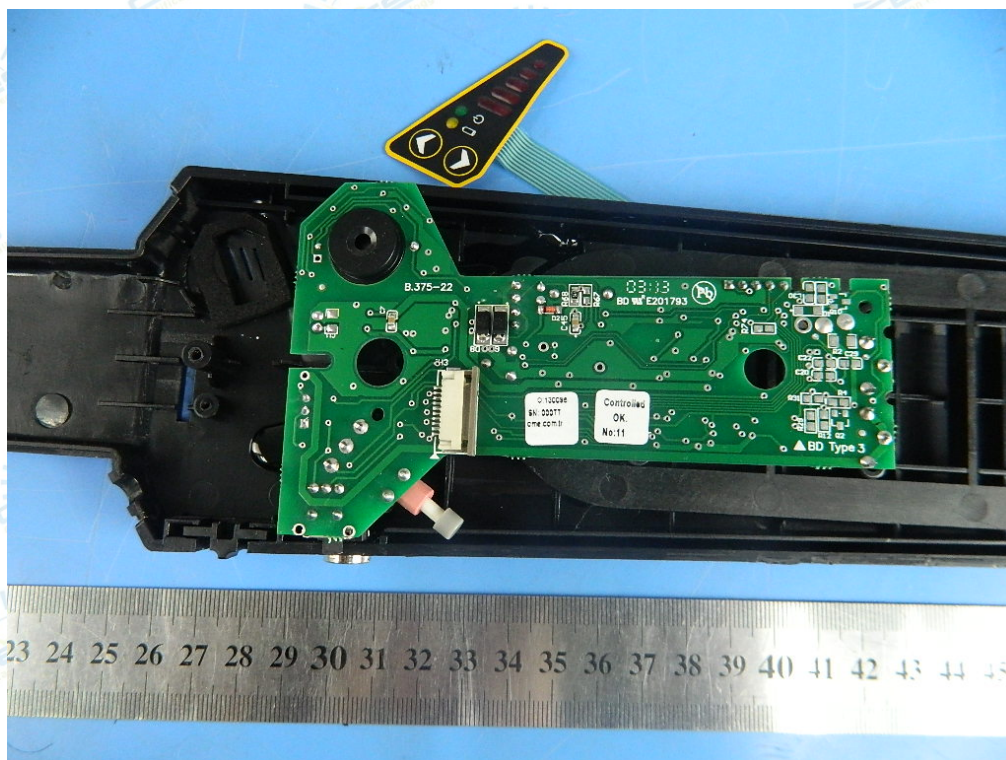

Inside View
-----THE END OF REPORT-----